

SMOKE SHARK™ II




SMOKE EVACUATION FOR THE OFFICE AND SURGERY CENTER



Dermat

info@dermat.be
www.dermat.be

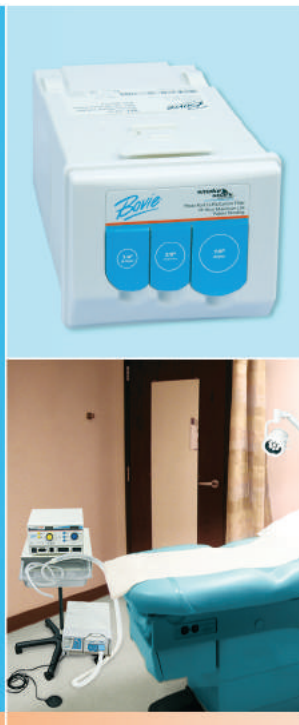

PROCEDURE SAFETY

AORN recommends the use of smoke evacuation systems during any medical procedure producing surgical smoke.

REDUCED RISK

500,000 healthcare professionals are exposed to surgical smoke proven to carry viruses, CO, and other chemical and biological hazards. The Smoke Shark II minimizes exposure to these toxic smoke plumes during electrosurgery, laser, and harmonic scalpel procedures.

COST EFFECTIVE

The Extended-Life Filter (SF35) offers up to 35 hours performance reducing procedure cost by 38%(+/-) when used at the lowest setting.

INCREASED EFFICIENCY

The Smoke Shark II Smoke Evacuator is compatible with most electrosurgical generators. The unit operates in conjunction with the optional Bovie Remote Activation Switch (SERS2) for maximized filter life and surgical efficiency.

MODERN DESIGN

A light-weight, ultra-quiet and compact design allowing for simplified operation, storage, and portability.

RELIABLE

The Smoke Shark II Smoke Evacuator includes a standard two (2) year manufacturer warranty.

SMOKE EVACUATOR

STANDARD SETUP

Long-Life 35-hr Filter	Pneumatic Footswitch	Smoke Evacuator Pencil Adapter with 6' Tube*	Remote Switch Activator*
			
SF35 (included)	FSSEP (included)	SEPAT	SERS2

* sold separately

Customize your Smoke Shark™ for a variety of applications by choosing from the accessories below:

6' Tube (non-sterile)	6' Tube with Wand & Tip (non-sterile)	6' Tubing for ValleyLab® & IEC Pencil (sterile)	Laser-Resistant Wand (non-sterile)	Reducer Fitting
				
786T†	SETW†	SEVL	SELW	SERF†

† Also available packed sterile

Disposable Suction Coagulators	
Handswitch Activated	Footswitch Activated
	
SCH08‡	SCF08‡

‡ Other sizes available



Arm Stand

OTHER OPTIONAL ACCESSORIES

Smoke Shark II Technical Specifications...

Dimensions:		Line Voltage:	Line Frequency:	Noise Level, dBA
Height	15.2 cm (6 in.)	SE02: 100/120 VAC	50 - 60 Hz	55.0 dBA (Maximum)
Width	27.9 cm (11 in.)	SE02-220: 240 VAC		
Depth	39.4 cm (15.5 in.)			
Weight	4.3 kgs (10 lbs)			
Warranty: limited two (2) year on unit only				

The Smoke Shark II meets U.S. and International Standards.

TECHNICAL SPECIFICATIONS