


ISP|100 Unit

Basic model

I-P02226

PRODUCT DESCRIPTION

Material	Stainless steel
Color	White, RAL 9016
Bottle Holder	Stainless steel bottle bar
Number of hooks	6
Arrangement of the hooks	In line with each other
Type of height adjustment	Screw height adjustment
Maximum length/height	2.200 mm
Minimum length/height	1.690 mm
Inner tube diameter	Square, 25 mm
Outer tube diameter	Ø 38 mm
Length of outer tube	1.420 mm
Base leg profile	45 x 25 mm
Base weight	Weighted
Base diameter	Ø 860 mm
Castors	Twin castors
Castor diameter	Ø 100 mm
Number of castors	5 with brakes and elect. conductivity
Total load capacity (kg)	50
Load capacity per system (kg)	12
Load capacity per hook (kg)	2

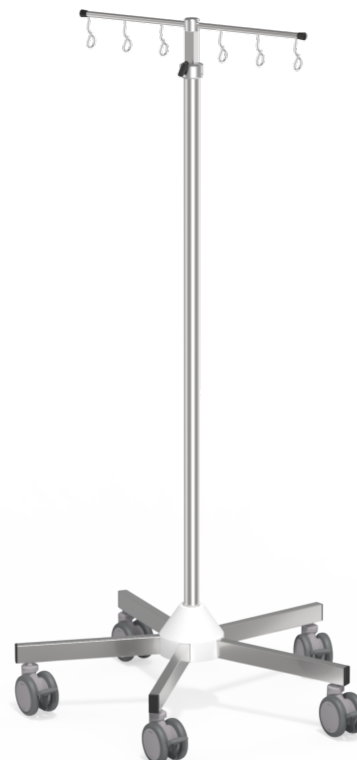


PACKAGING UNIT: UNIT

Width Box1	0,31 m
Height Box1	0,21 m
Length Box1	1,59 m
Weight Box1	25,70 kg



ISP|100 Unit



Area of application

comfortable height adjustment through a screw-height adjustment with an integrated, surface-gently mold clamping element

The outer tube offers enough space to attach various devices at a user-friendly operating height



Technology

All plastic parts are lightfast

Stainless steel tubes according to DIN EN 10217-7

Material ultrasonic and eddy current tested (according to EN 10246-9/3)

The integrated pull-out limiter prevents the adjustable tubes from separating

Safety bottle cross according to DIN ISO 15375

a sealing cap prevents the IV-pole from hygienical sensitive liquids



Safety

The base legs are sealed with plastic plugs (no risk of injury)

Low risk of pinching when retracting and extending the IV-pole thanks to the built-in safety distance

an integrated base-weights facilitates a safer attachment of various pumps and other medical equipment

No risk of injury thanks to the rounded shape of the bottle hooks

The geometry of the hooks prevents the infusion bottle from falling out

